


NEW NEW NEW

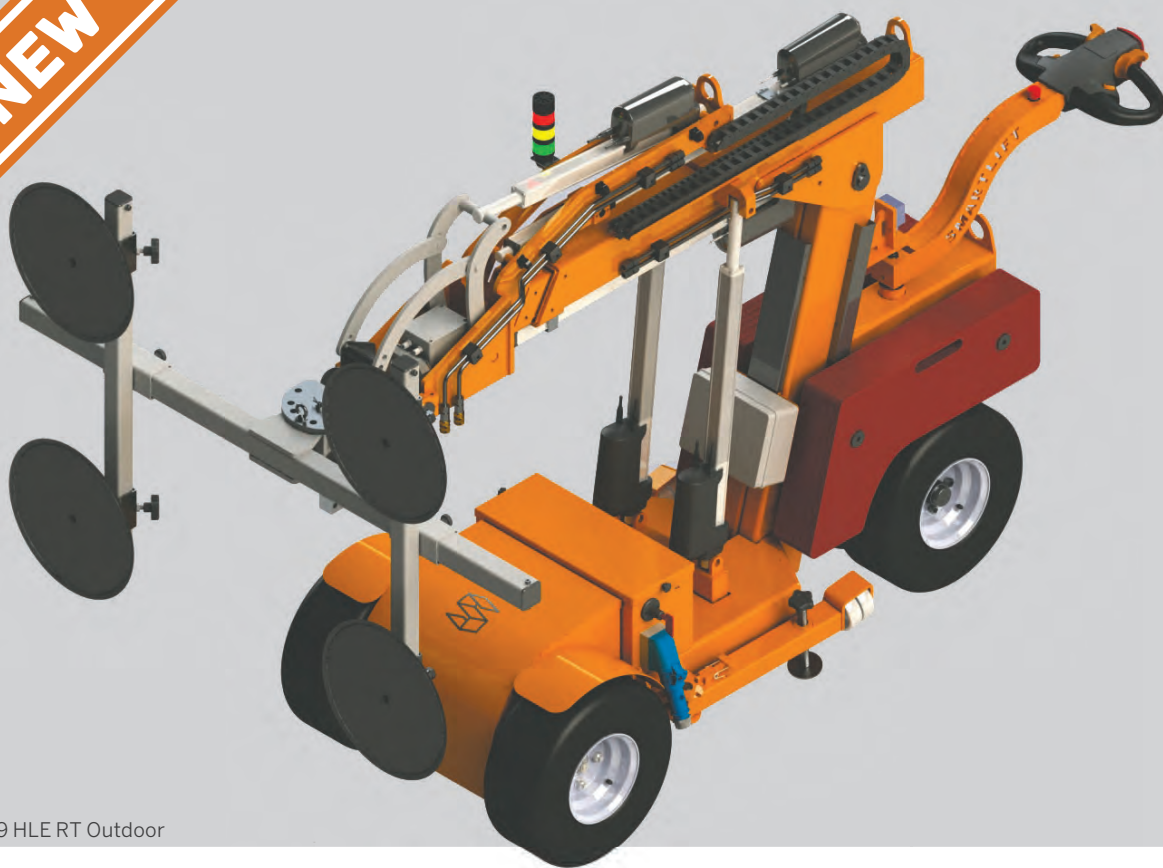

SL 609 HLE RT Outdoor

SL 609 HLE RT OUTDOOR

LIFTS UP TO 600 KG / 1,320 LBS.

The brand-new SL 609 HLE RT Outdoor series is the first of a new generation of Smartlift outdoor glass lifters. It features a long range of new and improved functionalities; designed for maximum efficiency, user-friendliness and workplace security:

A STRAIGHT UP-DOWN MOVEMENT

Not in a curve, but a precise and straight movement saving time and ensuring quick mounting

REMOTE CONTROLLED VACUUM SYSTEM

Improved safety and functionality

FASTER OPERATION WITH INCREASED SPEED FOR LIFTING AND TILTING

Still the same precision, but much faster actuators

SAVE AND RELOAD POSITION FOR REPEATED MOUNTING

Lift glass, activate positioning memory, release. Next.

BUILT IN IOT DEVICE FOR THEFT PROTECTION, TRACKING & FLEET MANAGEMENT

The Trackunit data insights support better and faster technical assistance from Smartlift via remote diagnostics

MAINTENANCE FREE GEL BATTERY PACK

Robust, long lifetime and generally available



REACH OF EXTENDED ARM
UP TO 230 CM /90 IN.



LIFTING HEIGHT
UP TO 420 CM /165 IN.



MAX EFFICIENCY,
USER-FRIENDLINESS,
AND SAFETY

SL 609 HLE RT OUTDOOR

TECHNICAL SPECIFICATIONS

Model	SL 609 HLE RT Outdoor
Lifting cap. arm in/out	600/150kg - 1340/330lb
Lifting height	4200mm/165in
Extension of arm	700+900mm/12ft 2in
Tip from horizontal	40° back / 100° fwd
Side shift	100mm / 4in
Charging voltage	230 V / 110V
Charging time	Approx. 8 hrs
Running period	Up to 9 hrs
Front-wheel drive	1500 W AC
Suction pads	4 x Ø400mm / 4 x Ø16in
Width	830mm / 33in
Curb weight	960kg / 2120lb
Class	IP 65

